AUTHENTICS



Home is where you can be your truest self. Where you walk around barefoot after a long day. The place you watch your kids grow up in, spilling ice cream along the way. Where your dog follows you around, leaving trails of fun-filled outdoor walks.

Your home expresses who you are. It's authentic. To the core.

Just like our Authentics Collection.

Mirroring genuine wood these new designs are as real as it gets. Unparalleled 3-dimensional structure. Exceptionally natural appearance.

Undeniable durability. Designed for real homes and real people.





Naturally, we thought about

(almost)

every benefit.



O.55 mm

 $8 \, \text{mm}$

6

CORK

WEAR LAYER TOTAL THICKNESS

WOOD DESIGNS

BACKING














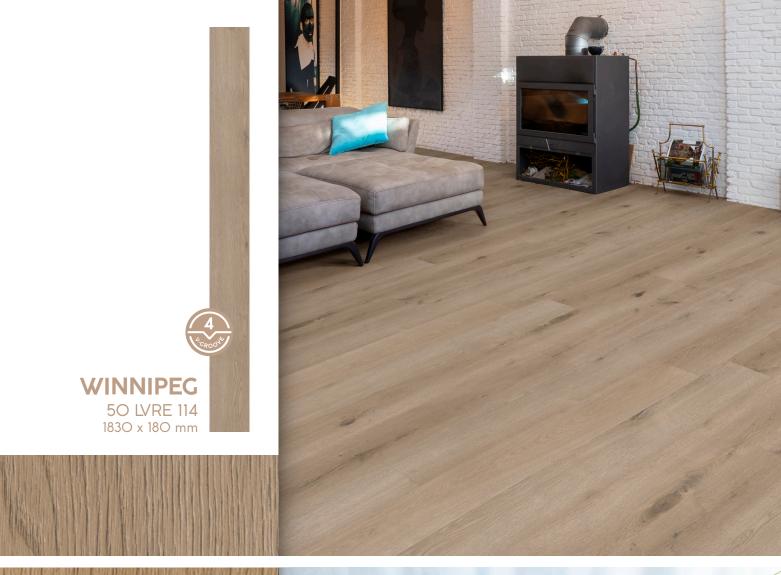





ACCESSORIES

Matching design accessories

Our design accessories match the design of your floor & are also 100% waterproof & shock resistant.








INSTALLATION

Easy to install

COREtec® floors have the easiest install in the market.

Follow these simple steps.

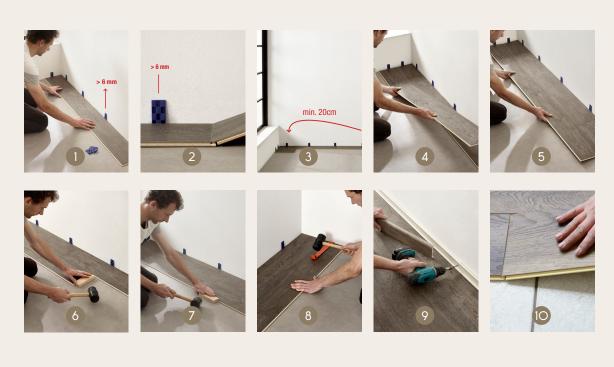



TECHNICAL SPECIFICATIONS



1830 x 180 mm



2,65 m² - 8 planks 23 kg/box²



8.00 mm



O.55 mm (EN ISO 24340)



Has bevels on the lona & short sides of the plank.

ON SELECTED QUALITIES



The embossing follows the structure of the wood for a real-life touch.

ON ALL WOOD QUALITIES

Level of use

Classe 23 / 33 (EN ISO 10874)

Geometrical characteristics

Conform (ISO 24337)

Wear resistance

Pass 5 000 cycles (EN 13329 Annex E)

Castor chair resistance

Pass 25 000 cycles (ISO 4918)

Effect of furniture leg

No visible change (EN 16581)

Residual indentation

≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining

5 (no visible change) (EN 438-2)

Locking strength

LS 2 2.0 / SS 2 3.5 (EN 24334)

Dimensional stability

Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light

> Grade 6 (ISO 105-B02)

Impact Sound Reduction

 $\Delta Lw = 20 dB (ISO 10140-3 / EN 717-2)$ $\Delta L_{LIN} = 10 \text{ dB}$ (ISO 10140-3 / EN 717-1)

Formaldehyde emission class

E1 (EN 717-1)

Fire classification

B_{fl} - S1 (EN 13501)

Slip resistance

DS - R1O (EN 13893 / DIN 51130)

Underfloor heating

Suitable (hydronic systems only)

Electrostatic performance

≤ 2 kV (EN 1815)

Thermal resistance

0.066 m²-K/W



WARRANTY RESIDENTIAL



WARRANTY COMMERCIAL























AUTHENTICS By Corefect

AVAILABLE AT

